



Downlighter ESaver

Downlighter 8W WW 220-240V GX53 1PF/6

Energy-saving lamps for GX53 based , which is designed for incandescent or halogen replacement

Downlighter ESaver

Product data

• General Information

Cap-Base	GX53 [GX53]
Bulb Shape	GX53
Nominal Lifetime (Nom)	6000 h
Switching Cycle	6000X

• Light Technical

Color Code	827 [CCT of 2700K]
Luminous Flux (Nom)	310 lm
Luminous Flux (Rated) (Nom)	310 lm
Color Designation	Warm White (WW)
Lumen Maintenance 2000 h (Nom)	83 %
Chromaticity Coordinate X (Nom)	463
Chromaticity Coordinate Y (Nom)	420
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	38 lm/W
Color Rendering Index (Nom)	82
LLMF At End Of Nominal Lifetime (Nom)	70 %

• Operating and Electrical

Input Frequency	50 or 60 Hz
Power (Rated) (Nom)	8.0 W
Lamp Current (Nom)	65 mA

Wattage Equivalent	32 W
Starting Time (Nom)	0.2 s
Warm Up Time To 60% Light (Min)	10 s
Warm Up Time To 60% Light (Max)	100 s
Power Factor (Nom)	0.6
Voltage (Nom)	220-240 V

• Controls and Dimming

Dimmable	No
----------	----

• Approval and Application

Energy Efficiency Label (EEL)	B
Mercury (Hg) Content (Max)	2.0 mg
Mercury (Hg) Content (Nom)	1.5 mg
Energy Consumption kWh/1000 h	8 kWh

• Product Data

Full product code	872790085087101
Order product name	Downlighter 8W WW 220-240V GX53 1PF/6
EAN/UPC - Product Order code	8727900850871 929689177102
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929689177102
Net Weight (Piece)	0.080 kg


Warnings and Safety

- Breaking a lamp is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a closed plastic

bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

- Compact fluorescent lamps have to be treated as special waste, they must be taken to your local waste facilities for recycling. The European Lighting Industry has set up an infrastructure, capable of recycling mercury, other metals, glass etc.

Dimensional drawing

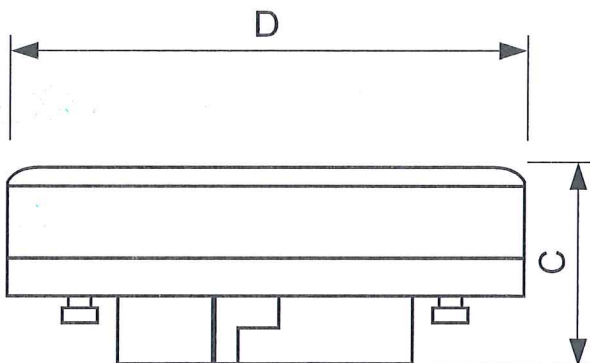

7W, 8W, 9W GX53

Reflector 8W/827 GX53 220-240V GX53

Product	D	C
Downlighter 8W WW 220-240V GX53 1PF/6	75.5 mm	29.5 mm

Dimensional drawing

