



Benefits

• General Information

Cap base	G8.5 [G8.5]
Bulb shape	T14 [T 14 mm]
Burning Position	UNIVERSAL [Any/Universal]
Life to 5% failures (nom.)	9000 h
Life to 10% failures (nom.)	10000 h
Life to 20% failures (nom.)	11000 h
Life to 50% failures (nom.)	12000 h
ANSI code HID	C130/E

• Light Technical

Lamp Luminous Flux (Nom)	3000 lm
Colour Designation	Warm white (WW)
Lumen maintenance 10,000 hours (nom.)	50 %
Lumen maintenance 2,000 hours (min.)	70 %
Lumen maintenance 2,000 hours (nom.)	80 %
Lumen maintenance 5,000 hours (min.)	50 %
Lumen maintenance 5,000 hours (nom.)	65 %
Chromaticity coordinate X (nom.)	0.432
Chromaticity coordinate Y (nom.)	0.394
Colour Temperature, horizontal (Nom)	3000 K
Lamp Luminous Efficacy EM (Nom)	79 lm/W

Colour Rendering Index,horiz (Nom)	81
------------------------------------	----

• Operating and Electrical

Power (Rated) (Nom)	35 W
Lamp current run-up (max.)	0.8 A
Lamp current (EM) (nom.)	0.53 A
Ignition supply voltage (max.)	198 V
Ignition peak voltage (max.)	5000 V
Ignition supply voltage (min.)	198 V
Ignition peak voltage (min.)	3500 V
Re-ignition time (min.) (max.)	15 min
Ignition time (max.)	30 s
Voltage (Max)	96 V
Voltage (Min)	80 V
Voltage (Nom)	88 V

• Controls and Dimming

Dimmable	no
Run-up time 90% (max.)	3 min

• Mechanical and Housing

Bulb finish	Clear (CL)
Bulb material	UV-Block Quartz

- Approval and Application

Energy efficiency label (EEL)	A
Mercury (Hg) content (nom.)	3 mg
Energy Consumption kWh/1000 h	43 kWh
- UV

PET (NIOSH) (min.)	8 h/500lx
Damage factor D/fc (max.)	0.3
- Luminaire Design Requirements

Bulb temperature (max.)	500 °C
-------------------------	--------

Pinch temperature (max.) 300 °C

- Product Data


Full product code	871150020000615
Order product name	MASTERColour CDM-TC 35W/830 G8.5 1CT/12
EAN/UPC – product	8711500200006
Order code	928085205125
Numerator – quantity per pack	1
Numerator – packs per outer box	12
Material no. (12NC)	928085205125
Net weight (piece)	10.000 g
ILCOS Code	MT/UB-35/830-H-G8.5-17/85

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Control gear must include end-of-life protection (IEC61167, IEC 62035)

- Use only with electronic control gear. 35W/830 lamps may also use electromagnetic gear.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing

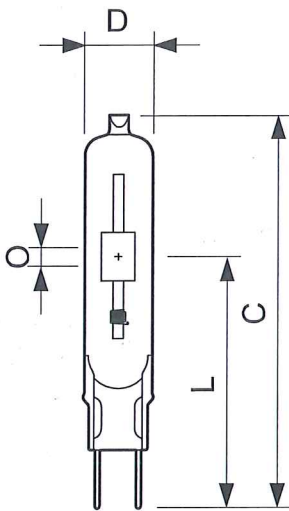

CDM-TC 35W /830, /842

CDM-TC 35W/830 G8.5

Product	D	D	O	L	L	L	C
MASTERColour CDM-TC 35W/830 G8.5 1CT/12	15 mm	0.5 in	5 mm	51 mm	53 mm	52 mm	85 mm